

Innovative, the wireless charge indicator has been made for real-time monitoring of 12V & 24V battery charging for all vehicles. Easy to use with its dedicated application (to download), it will keep the test history to improve the management of the fleet of vehicles.

100% COMPATIBLE WITH ALL LEAD-ACID BATTERIES

- Batteries LIQUID / START & STOP / AGM / EFB / GEL
- Capacity from 7 to 230 Ah
- Conform with lead acid batteries 12V and 24 V (motobike, VL, PL,...)




INTUITIVE APPLICATION


- Ergonomic interface and easy use
- Full test report (time, date, name,...)
- Result sharing by e-mail
- Test history
- Line connection : 10 m



INSTANT ANALYSIS


- Battery voltage (7 V to 32 V)
- State of charge and battery health easy to read :

 > 12,5 V	The battery is fully charged.
 11,8 > 12,4 V	The battery is slightly discharged, it can be recharged.
 < 11,7 V	The battery is discharged, please recharge it immediately or replace it.

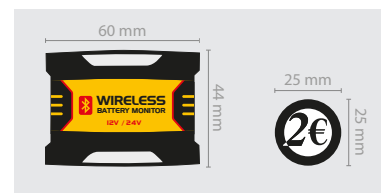





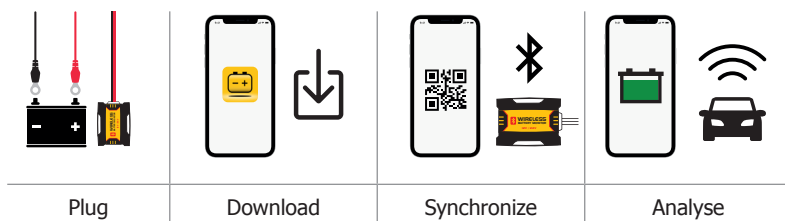


ERGONOMIC INDICATOR

- Compact and very muted
- Waterproof housing
- Operation temperature from -20°C to +85°C



■ Application (iPhone iOS 7.0+ / Android OS 4.3+) Free & multilingual 

		TEST			IP				
V	Ah	min	mm	mm		A	cm	v	kg
12-24 V	7>230 Ah	7 V	60 x 44 x 14	280 x 65 x 45	IP65	1A	60 cm	v4.0	0.4